



No.8 Haitai Huake Rd2(Huayuan), Binhai Hi-Tech Zone, Tianjin 300384, China Tel: +86-22-58596037 Fax: +86-22-58596177 en.tiandy.com

How to use Video Input on Decoder

Description: You will learn how to use Video Input on Decoder


Note: Tiandy has different-channel decoder, but the setting and method is same

Prerequisites: The input port are HDMI or DVI, please make sure your device output port

Section Input connect; equipment add & video display

Step 1 Input connect

Interface of decoder as follow picture, we have two HDMI-in ports and two DVI-in ports, you can choose by yourself, and our DVI-in port support VGA port conversion, we provide the conversion head in our accessories

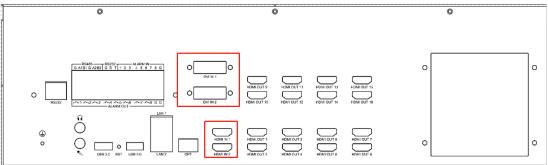

Sept 2 Equipment add

2.1 Go to Configuration-Decode Management.

2.2Select the Equipment type: Local Input.

Note: Local Input means the video input from the HDMI IN and DVI IN port.

Tiandy Displa	ay Config	uration	System	Log							admin (E
Plan management	Curre	ent position:	Configuration / Dec	ode management							
Decode management	Name		Equipment type	Connection mode	Server address	Port No.	Server Channel	User name	Password	Operation	
Senior	⊡ Scre	en 1	Normal	_							
Serial port management	6	Channel 1	Onvif								
DDNS management			LocalInput				Local Input 1 🗸			Save Cancel	
Protocol management			÷								
Alarm management	E Scre	en 2									
Character overlay	1	E Channel 1									
Change password			÷								
Platform access	⊡ Scre										
System management	1	Channel 1									
			Ð								
	E Scre	en 6									
	1	Channel 1									
			÷								
	⊡ Scre	en 9									
	6	Channel 1									
			\oplus								
	E Scre	en 10									
	8	Channel 1									
			(\pm)								

2.3 Select the Server Channel

Note: Local Input 1 --- HDMI IN 1; Local Input 2 --- HDMI IN 2; Local Input 3 --- DVI IN 1; Local Input 4 --- DVI IN 2

Tiandy Technologies Co., Ltd.

 Tiondy
 Ilandy
 Iecnnologies
 O.,
 Lid.

 No.8 Haitai Huake Rd2(Huayuan), Binhai Hi-Tech Zone, Tianjin 300384, China Tel: +86-22-58596037
 Fax: +86-22-58596177
 en.tiandy.com

Tiandy	Display	Configuration	System	Log						
Plan management		Current position:	Configuration / Decor	le management				_		
Decode management		Name	Equipment type	Connection mode	Server address	Port No.	Server Channel	User name	Password	Operation
Senior		E Screen 1								
Serial port managem	ient	E Channel 1					Local Input 1 Local Input 2]		
DDNS management			Localinput 🗸				Local Input 3 Local Input 4			Save Cancel
Protocol management	nt		÷					-		
Alarm management		E Screen 2						_		
Character overlay		E Channel 1								
Change password			÷							
Platform access		E Screen 5								
System managemen	t	E Channel 1								
			+							

2.4Click Save after setting

Tiandy	Display	Configuration	System	Log						admin	n (B
Plan management		Current position:	Configuration / Decor	le management							
Decode management		Name	Equipment type	Connection mode	Server address	Port No.	Server Channel	User name	Password	Operation	
Senior		Screen 1									
Serial port manageme	ent	E Channel 1									
DDNS management			LocalInput 🗸				Local Input 3 🗸			Save Cancel	
Protocol managemen	t		\oplus						1		
Alarm management		E Screen 2									
Character overlay		E Channel 1									
Change password			÷								
Platform access		E Screen 5							/		
System management		Channel 1						1 · · · · · · · · · · · · · · · · · · ·			

Sept 3 Video display

3.1 Go to the Display menu, select corresponding screen.

3.2Click the connect icon on the bottom, then you will see the video from the HDMI/DVI Input

Tiandy	Display	Configuration	System	Log	admin 🕞
🗇 TV wal	management	Current position	a: Preview / Scree	1	
Screen 1	0	1			
Screen 2	0				
Screen 5	¢				
Screen 6	٥				
Screen 9	¢				(-) $(+)$
Screen 10 Screen 13	ہ ہ				(-) Focus (+)
Screen 14	÷				(-) Zoom (+)
Screen 15	¢				Aperture +
Screen 16	٥				Presetting bit
MScreen 1 Screen 3,Screen 4,Sc	reen 7, 🌣				
		000	D (1) (2) (2)	() () () () () () () () () () () () () (