



iControl Face & Fingerprint Access Control System

New model iControl is popular in the market with smart design, with 4.3 TFT Touch screen, improved function that support WIFI, access control, bell, RFID. professional communication port with wiegand in & out, 2 × relay, NC, NO, alarm, etc.

Device with silicone keypad and ring bell .

Data be managed via TCP/IP, WiFi, and USB host port for data up / download to avoid the risk of accidental deletion, what's more, friendly AC software Taurus with perfect setting of time zone, tamper alert, anti pass etc.


- World-class algorithm, high-speed and accurately identify face.
- Face/Fingerprint/Pin/Card authentication.
- Suitable for the entrances and exits of office, factory, hotel, school, etc.
- Large capacity, user capacity upto 2,000, logs capacity upto 200,000.
- 4.3 Touch screen.
- TCP/IP + USB Flash Drive Download + USB Communication.
- More helpful function like T9 input method, self-service inquiry, etc.
- Support door control & alarm function.
- USB flash drive for offline data management.
- Multi-language: English, Arabic, French, Spanish, Portuguese, etc.
- Multiple shifts setting.
- Professional AC software Taurus.
- Easy wall-mounting.
- Exact calculation of worked hours / overtime.



4.3 Inches Touch Screen



Face + Fingerprint Sensor

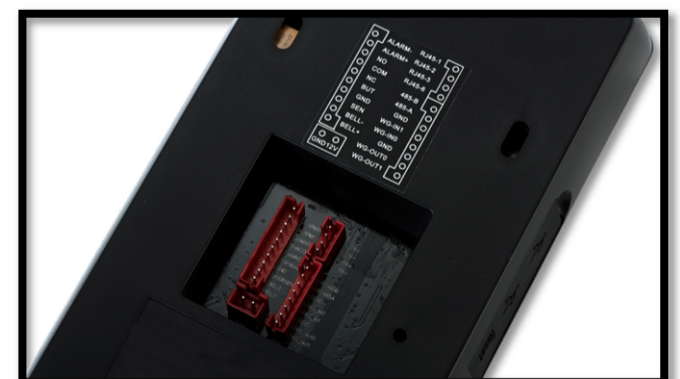

Interface

TECHNICAL SPECIFICATIONS

• Biometric Measurement	Face & Fingerprint
• Face capacity	2,000
• Fingerprint capacity	10,000
• Log capacity	200,000
• CPU	1GHz
• LCD display	4.3" TFT color screen 240x320 pixel
• Interface	TCP/IP, USB (host and slave), 2 × Relay, wiegand in & out
• Language	English, Arabic, French, Korean, Spanish, Portuguese, etc
• Attendance mode	Face + Fingerprint or Face or Fingerprint or Password or Card or Fingerprint+Password or Card+Password or Fingerprint+Card+Password
• Voice instruction	16-bit Hi-Fi voice & sound indication
• Verification time	< 0.5 second [1:N]
• FRR (False Rejection Rate)	< 1%
• FAR (False Acceptance Rate)	< 0.0001%
• Power source	12VDC/2A
• Operating temperature	0°C-45°C
• Operating humidity	<90%RH
• Dimensions (mm)	147 x 175 x 62
• Weight (kg)	0.3
• Quantity/Carton	20 units
• Gross weight/carton (kg)	15.3
• Carton size	510 x 300 x 650
• Quantity / container	3200 units per 20' container

FACE & FINGERPRINT ACCESS CONTROL


Brand: PROLAB
Model: iControl
Software: Taurus AC Software

OPTIONAL FUNCTION:


• RF card	125kHz EM
• WiFi	2.4GHz

R&D TEAM
BEST SUPPORT

APPLICATION

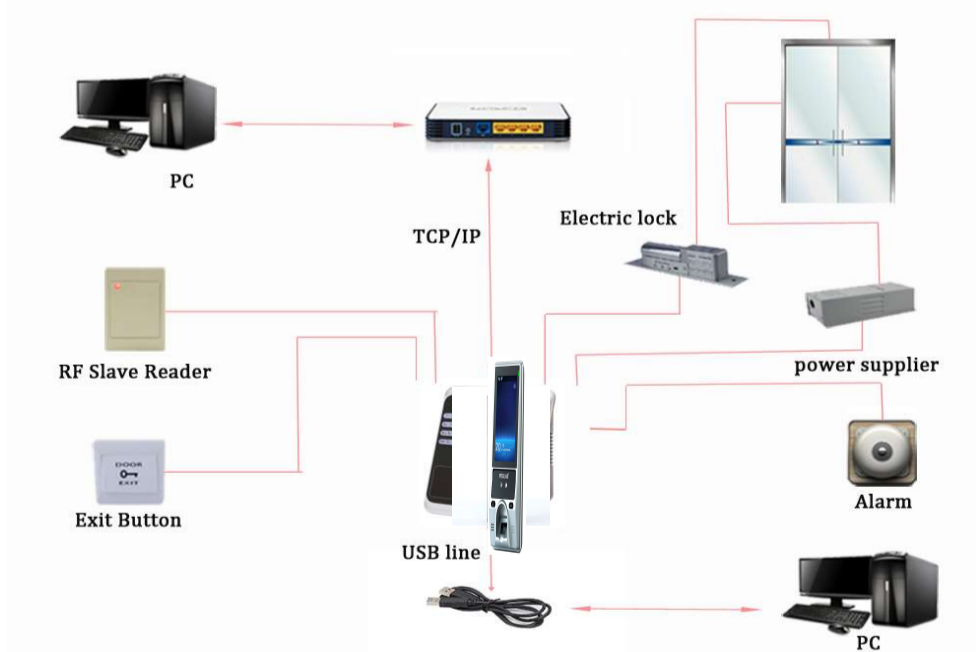

INTERFACE

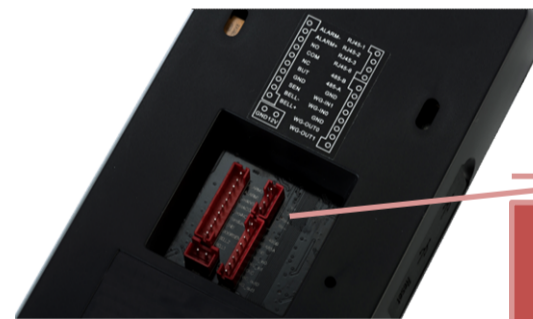

ALARM-	RJ45-1
ALARM+	RJ45-2
NO	RJ45-3
COM	RJ45-6
NC	485-B
BUT	485-A
GND	GND
SEN	WG-IN1
BELL-	WG-IN0
BELL+	GND
GND 12'	WG-OUT0
	WG-OUT1

ACCESSORIES



Philex WHOLESALE

Add.:

Tel:

www.prolabsecurity.com